

# **EXHIBIT 3**

(12) **United States Patent**  
**Havemose**

(10) **Patent No.:** **US 10,606,634 B1**  
(45) **Date of Patent:** **Mar. 31, 2020**

(54) **SYSTEM AND METHOD FOR APPLICATION ISOLATION**

(58) **Field of Classification Search**  
None  
See application file for complete search history.

(71) Applicant: **OPEN INVENTION NETWORK LLC**, Durham, NC (US)

(72) Inventor: **Allan Havemose**, Arroyo Grande, CA (US)

(73) Assignee: **OPEN INVENTION NETWORK LLC**, Durham, NC (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

763,308 A	6/1904	Mitchell
5,774,660 A	6/1998	Brendel et al.
5,951,650 A	9/1999	Bell et al.
5,996,016 A	11/1999	Thalheimer et al.
6,021,408 A	2/2000	Ledain et al.
6,026,499 A	2/2000	Shirakihara et al.

(Continued)

(21) Appl. No.: **16/278,659**

**OTHER PUBLICATIONS**

(22) Filed: **Feb. 18, 2019**

Karablieh et al.; "Heterogeneous Checkpointing for Multithread Applications", IEEE 21st Symposium on Reliable Distributed Systems, Oct. 13-16, 2002, pp. 140-149.

(Continued)

**Related U.S. Application Data**

(63) Continuation of application No. 15/641,300, filed on Jul. 4, 2017, now Pat. No. 10,210,017, which is a continuation of application No. 15/149,518, filed on May 9, 2016, now Pat. No. 9,697,038, which is a continuation of application No. 14/606,175, filed on Jan. 27, 2015, now Pat. No. 9,336,045, which is a continuation of application No. 13/708,477, filed on Dec. 7, 2012, now Pat. No. 8,943,500, which is a continuation of application No. 12/421,691, filed on Apr. 10, 2009, now Pat. No. 8,341,631.

*Primary Examiner* — Qing Yuan Wu


(51) **Int. Cl.**  
**G06F 9/46** (2006.01)  
**G06F 8/61** (2018.01)  
**G06F 9/50** (2006.01)  
**G06F 9/455** (2018.01)  
**G06F 11/00** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **G06F 9/46** (2013.01); **G06F 8/61** (2013.01); **G06F 8/62** (2013.01); **G06F 9/455** (2013.01); **G06F 9/50** (2013.01); **G06F 11/008** (2013.01)

(57) **ABSTRACT**

A system, method, and computer readable medium for providing application isolation to one or more applications and their associated resources. The system may include one or more isolated environments including application files and executables, and one or more interception layers intercepting access to system resources and interfaces. Further, the system may include an interception database maintaining mapping between the system resources inside the one or more isolated environments and outside, and a host operating system. The one or more applications may be isolated from other applications and the host operating system while running within the one or more isolated environments.

**20 Claims, 10 Drawing Sheets**

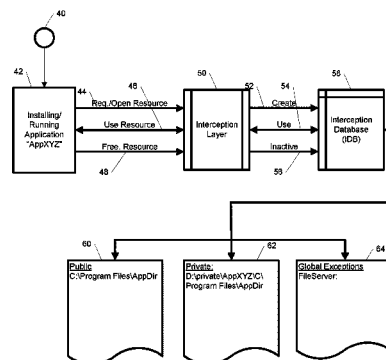

## US 10,606,634 B1

Page 2

(56)

## References Cited

## U.S. PATENT DOCUMENTS

6,085,086	A	7/2000	Porta et al.	2005/0172082	A1	8/2005	Liu et al.
6,105,148	A	8/2000	Chung et al.	2005/0213498	A1	9/2005	Appanna et al.
6,144,999	A	11/2000	Khalidi et al.	2005/0251785	A1	11/2005	Vertes et al.
6,154,877	A	11/2000	Ramkumar et al.	2005/0262097	A1	11/2005	Sim-Tang et al.
6,161,219	A	12/2000	Ramkumar et al.	2005/0262411	A1	11/2005	Vertes et al.
6,167,385	A	12/2000	Hartley-Urquhart	2005/0268273	A1	12/2005	Fresko et al.
6,189,111	B1	2/2001	Alexander et al.	2005/0278688	A1	12/2005	Buskens et al.
6,269,442	B1	7/2001	Oberhauser et al.	2006/0015764	A1	1/2006	Ocko et al.
6,314,567	B1	11/2001	Oberhauser et al.	2006/0031547	A1	2/2006	Tsui et al.
6,321,275	B1	11/2001	McQuistan et al.	2006/0053228	A1	3/2006	Rachman et al.
6,484,276	B1	11/2002	Singh et al.	2006/0075381	A1	4/2006	Laborczfalvi et al.
6,496,847	B1	12/2002	Bugnion et al.	2006/0080411	A1	4/2006	Buskens et al.
6,496,979	B1	12/2002	Chen et al.	2006/0085679	A1	4/2006	Neary et al.
6,560,626	B1	5/2003	Hogle et al.	2006/0090097	A1	4/2006	Ngan et al.
6,574,618	B2	6/2003	Eylon et al.	2006/0143512	A1	6/2006	Jia et al.
6,601,081	B1	7/2003	Provino et al.	2006/0156403	A1	7/2006	Haefele et al.
6,715,238	B2	4/2004	Zambelli et al.	2006/0206873	A1	9/2006	Argade
6,718,538	B1	4/2004	Mathiske	2006/0262716	A1	11/2006	Ramaiah et al.
6,766,314	B2	7/2004	Burnett	2006/0262734	A1	11/2006	Appanna et al.
6,795,966	B1	9/2004	Lim et al.	2007/0007336	A1	1/2007	Kindberg
6,823,474	B2	11/2004	Kampe et al.	2007/0028110	A1	2/2007	Brennan
6,941,281	B1	9/2005	Johnson	2007/0028302	A1	2/2007	Brennan et al.
6,964,034	B1	11/2005	Snow	2007/0028303	A1	2/2007	Brennan
7,028,305	B2	4/2006	Schaefer	2007/0028304	A1	2/2007	Brennan
7,058,696	B1	6/2006	Phillips et al.	2007/0083501	A1	4/2007	Pedersen et al.
7,076,555	B1	7/2006	Orman et al.	2007/0083522	A1	4/2007	Nord et al.
7,089,294	B1	8/2006	Baskey et al.	2007/0083610	A1	4/2007	Treder et al.
7,093,086	B1	8/2006	Rietschote	2007/0083655	A1	4/2007	Pedersen
7,096,388	B2	8/2006	Singh et al.	2007/0107052	A1	5/2007	Cangini et al.
7,127,713	B2	10/2006	Davis et al.	2007/0156659	A1	7/2007	Lim
7,197,700	B2	3/2007	Honda et al.	2007/0174191	A1	7/2007	Keaton et al.
7,207,039	B2	4/2007	Komarla et al.	2007/0192518	A1	8/2007	Rupanagunta et al.
7,213,246	B1	5/2007	Rietschote et al.	2007/0244987	A1	10/2007	Pedersen et al.
7,246,256	B2	7/2007	Cruz et al.	2007/0248085	A1	10/2007	Volpano
7,257,811	B2	8/2007	Hunt et al.	2007/0255653	A1	11/2007	Tumminaro et al.
7,269,645	B2	9/2007	Goh et al.	2007/0260733	A1	11/2007	Havemose et al.
7,353,203	B1	4/2008	Kriplani et al.	2007/0277056	A1	11/2007	Varadarajan et al.
7,363,365	B2	4/2008	Ocko et al.	2007/0294578	A1	12/2007	Qiao et al.
7,370,071	B2	5/2008	Greschler et al.	2008/0098006	A1	4/2008	Pedersen et al.
7,380,087	B2*	5/2008	Johnson	2008/0104441	A1	5/2008	Rao et al.
			G06F 16/10	2008/0154769	A1	6/2008	Anderson et al.
			711/170	2008/0195824	A1	8/2008	Sadovsky et al.
7,447,896	B2	11/2008	Smith et al.	2008/0295114	A1	11/2008	Argade et al.
7,467,370	B2	12/2008	Proudler et al.	2008/0301760	A1	12/2008	Lim
7,512,815	B1	3/2009	Munetoh	2009/0089406	A1	4/2009	Roush et al.
7,519,963	B1	4/2009	Blaser et al.	2009/0228576	A1	9/2009	Rosenan et al.
7,523,344	B2	4/2009	Qiao et al.	2009/0254900	A1	10/2009	Nakamura
7,543,182	B2	6/2009	Branda et al.	2009/0271787	A1	10/2009	Clark
7,613,921	B2	11/2009	Scarlata	2009/0310663	A1	12/2009	Menon et al.
7,673,308	B2	3/2010	McMillan et al.	2009/0313363	A1	12/2009	Parsons et al.
7,694,123	B2	4/2010	Prasse et al.	2010/0023996	A1	1/2010	Sabin et al.
7,725,763	B2	5/2010	Vertes et al.	2010/0107158	A1	4/2010	Chen et al.
7,761,573	B2	7/2010	Travostino et al.	2010/0268667	A1	10/2010	King et al.
8,065,714	B2	11/2011	Budko et al.	2011/0119748	A1	5/2011	Edwards et al.
8,104,085	B2	1/2012	Fresko et al.	2011/0208908	A1	8/2011	Chou et al.
8,171,483	B2	5/2012	Nord et al.	2012/0054486	A1	3/2012	Lakkavalli et al.
8,831,995	B2	9/2014	Holler et al.	2013/0054484	A1	2/2013	Hoeflinger et al.
2002/0007468	A1	1/2002	Kampe et al.	2013/0204664	A1	8/2013	Romagnolo et al.
2002/0038277	A1	3/2002	Yuan	2013/0226688	A1	8/2013	Harvilicz et al.
2002/0087916	A1	7/2002	Meth	2014/0032298	A1	1/2014	Corrie et al.
2002/0124089	A1	9/2002	Aiken et al.	2014/0032307	A1	1/2014	Corrie et al.
2002/0169884	A1	11/2002	Jean et al.	2014/0032308	A1	1/2014	Corrie et al.
2002/0174265	A1	11/2002	Schmidt	2014/0032309	A1	1/2014	Corrie et al.
2003/0010272	A1	1/2003	Sheikholeslam et al.	2014/0032310	A1	1/2014	Corrie et al.
2003/0018927	A1	1/2003	Gadir et al.	2014/0058804	A1	2/2014	Zhou et al.
2003/0028635	A1	2/2003	DeMent et al.	2014/0143120	A1	5/2014	Clarke et al.
2003/0069993	A1	4/2003	Na et al.	2014/0164049	A1	6/2014	Yakos et al.
2003/0140041	A1	7/2003	Rosensteel et al.	2014/0171039	A1	6/2014	Bjontegard
2003/0140272	A1	7/2003	Lawrance et al.	2014/0244486	A1	8/2014	Abril
2004/0044721	A1	3/2004	Song et al.	2014/0279682	A1	9/2014	Feldman
2004/0064398	A1	4/2004	Browne et al.	2014/0304137	A1	10/2014	Olson et al.
2004/0153700	A1	8/2004	Nixon et al.	2014/0316823	A1	10/2014	Cooper
2004/0210895	A1	10/2004	Esfahany	2014/0351116	A1	11/2014	Hoff
2004/0268175	A1	12/2004	Koch et al.				
2005/0050304	A1	3/2005	Mukherjee et al.				
2005/0071824	A1	3/2005	N. et al.				

**US 10,606,634 B1**

Page 3

---

(56)

**References Cited**

U.S. PATENT DOCUMENTS

2014/0358766 A1 12/2014 Nayyar et al.  
2015/0351116 A1 12/2015 Shoshan et al.

OTHER PUBLICATIONS

Medina, "Understanding AIE to Citrix Presentation Server 4", May 12, 2005, Tech Target.

Nam et al., "Probabilistic Checkpointing", IEICE Trans. Inf. & Syst., vol. E85-D, No. 7, Jul. 2002, pp. 1093-1104.

Sancho et al., "On the Feasibility of Incremental Checkpointing for Scientific Computing", Proceedings of the 18th International Parallel and Distributed Processing Symposium, Apr. 2004, 10 Pages.

\* cited by examiner

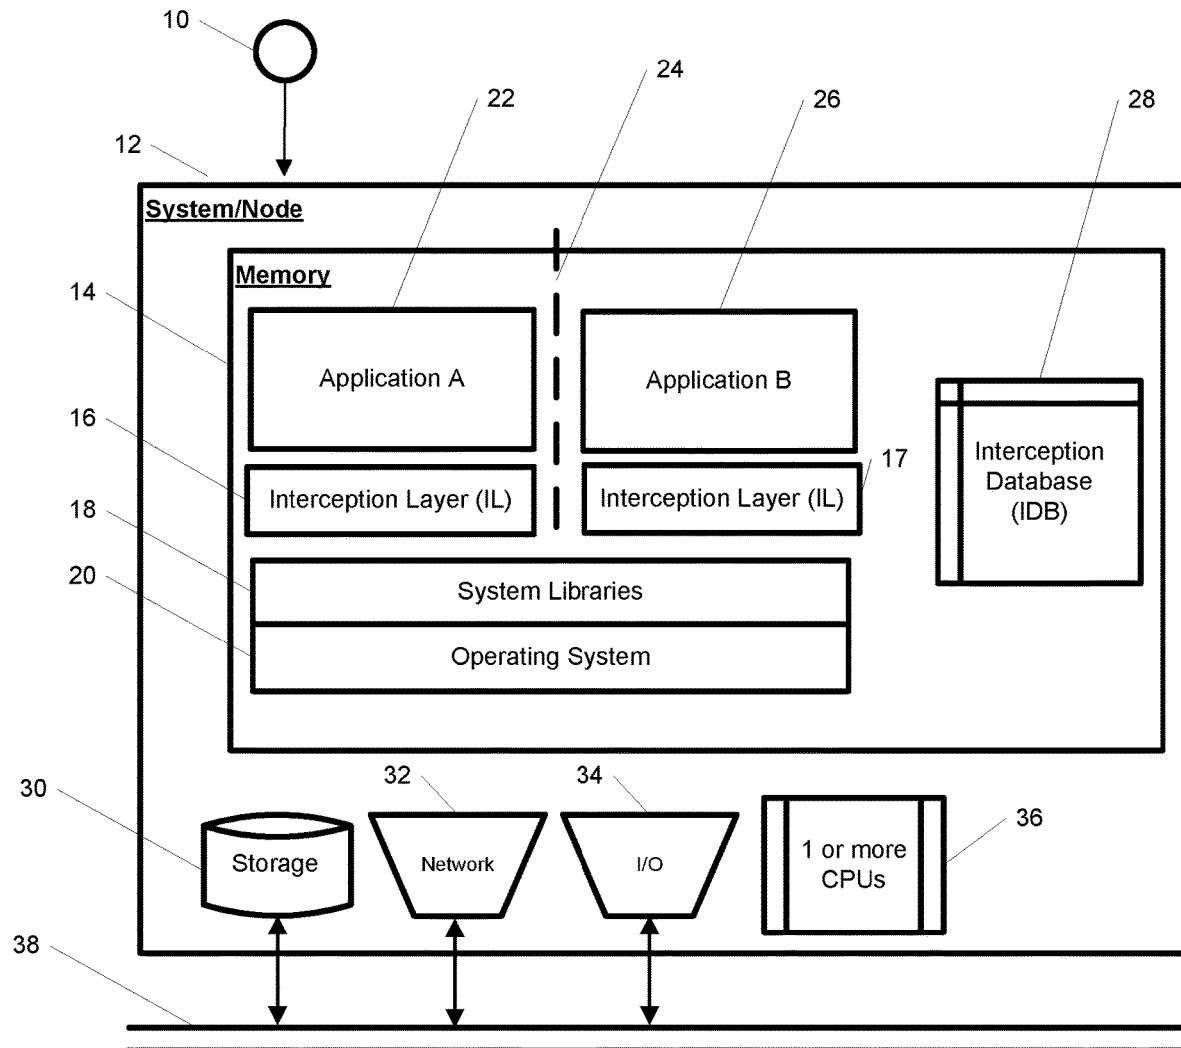


FIG.1 – System Overview

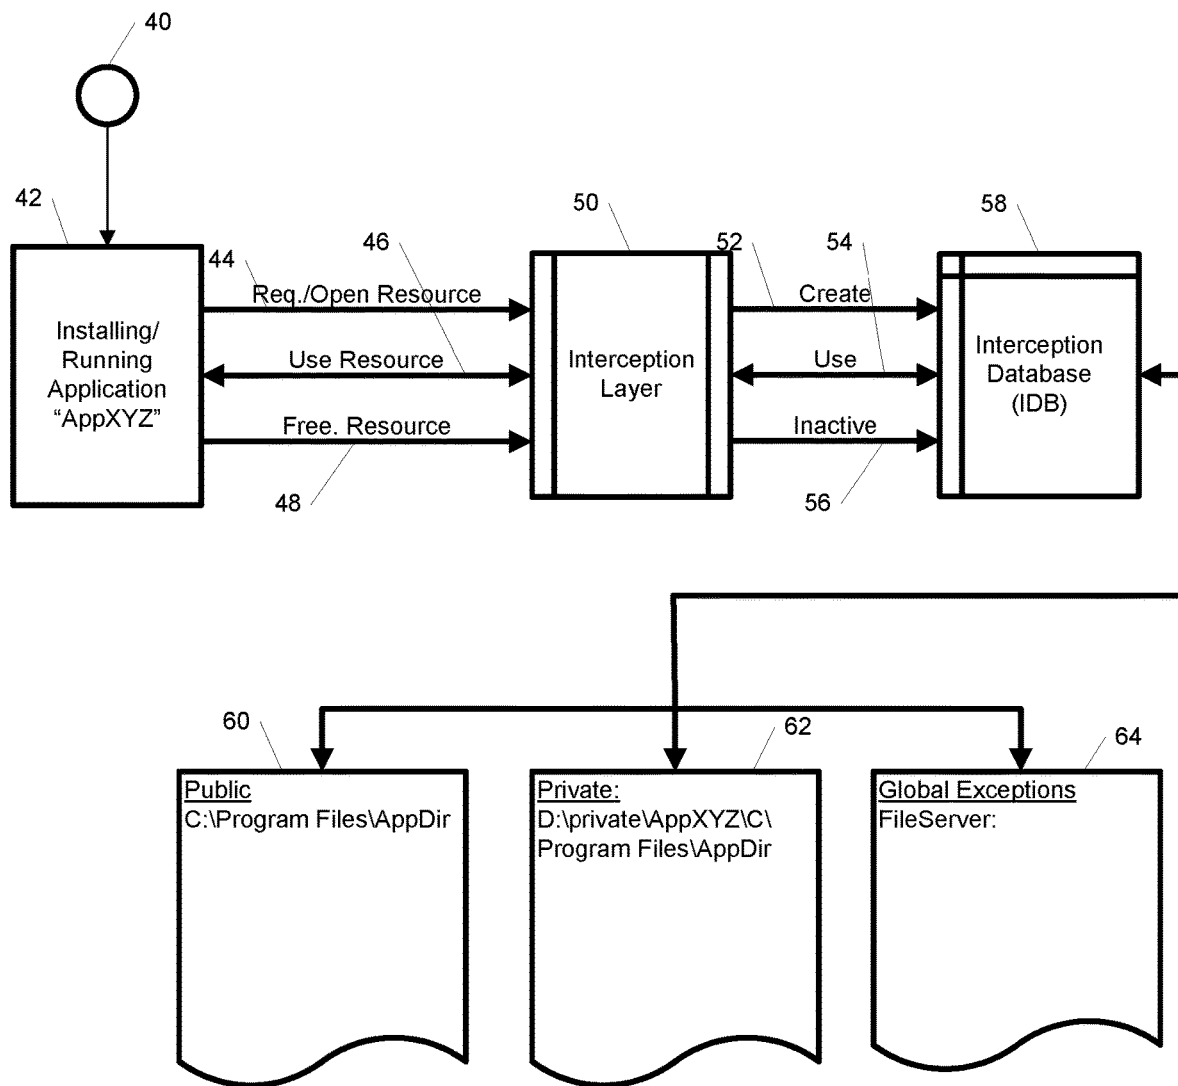


FIG.2 – Installing and running an Application

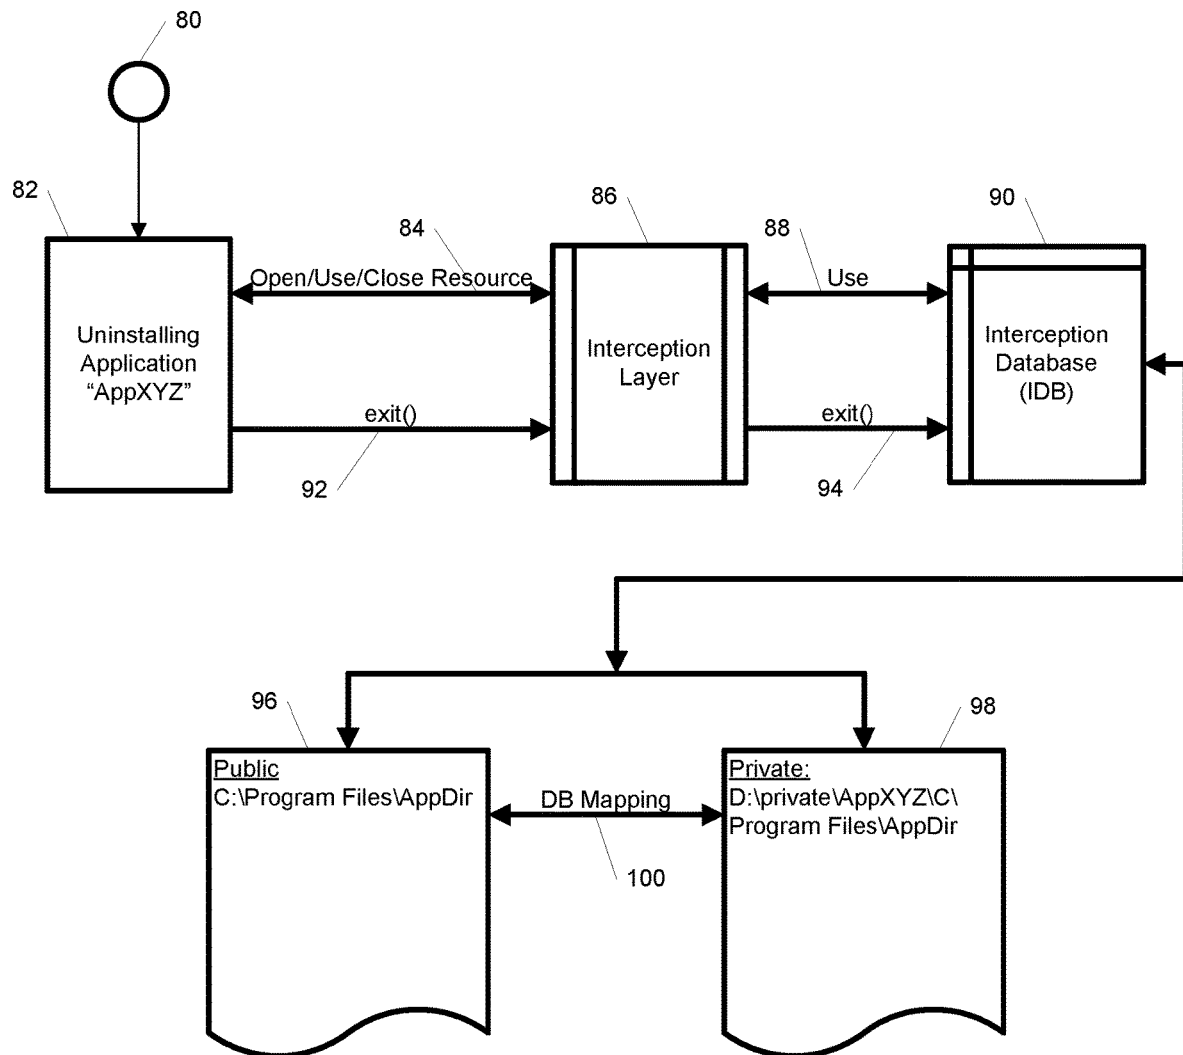


FIG.3 – Un-Installing an Application

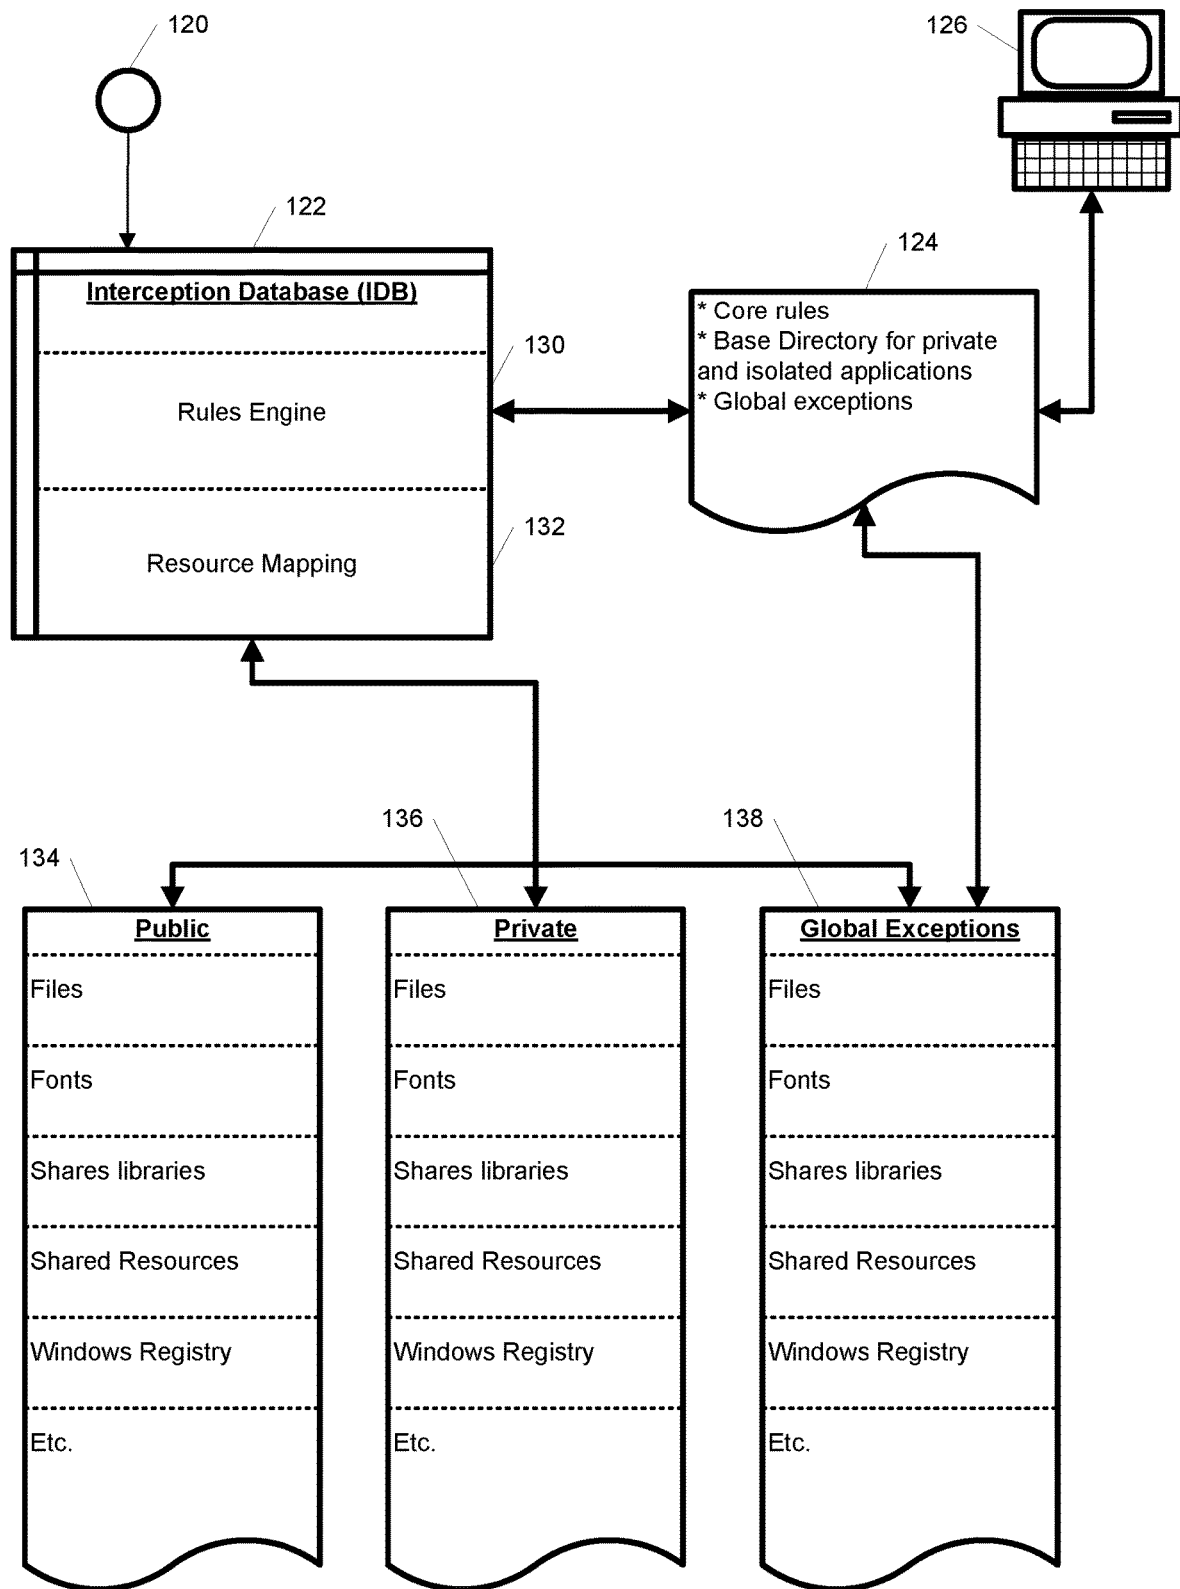


FIG.4 – Interception Database (IDB)



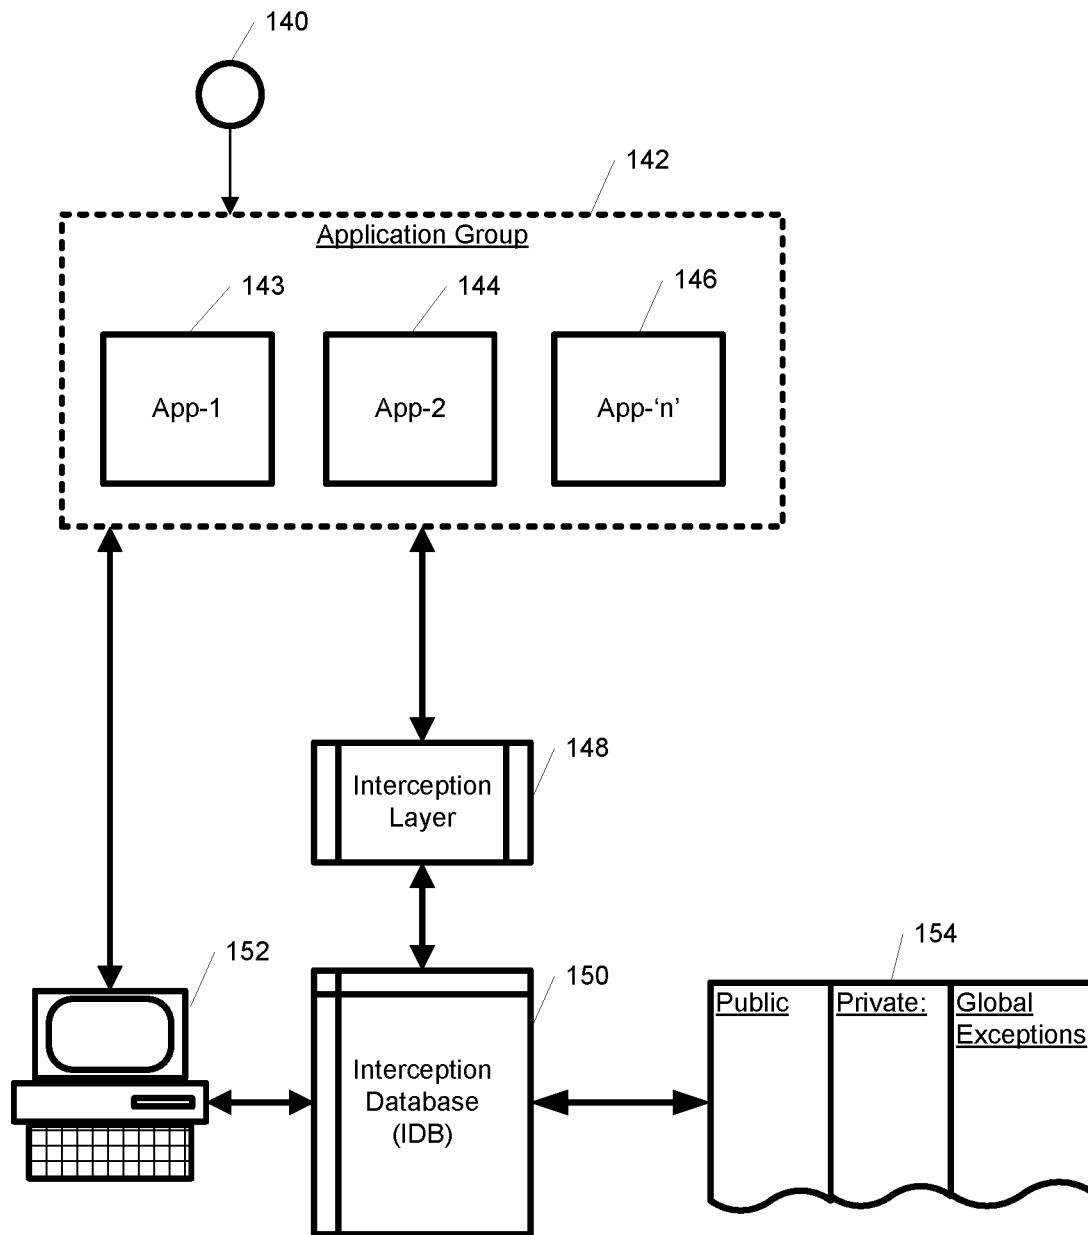


FIG.5 – Application Groups

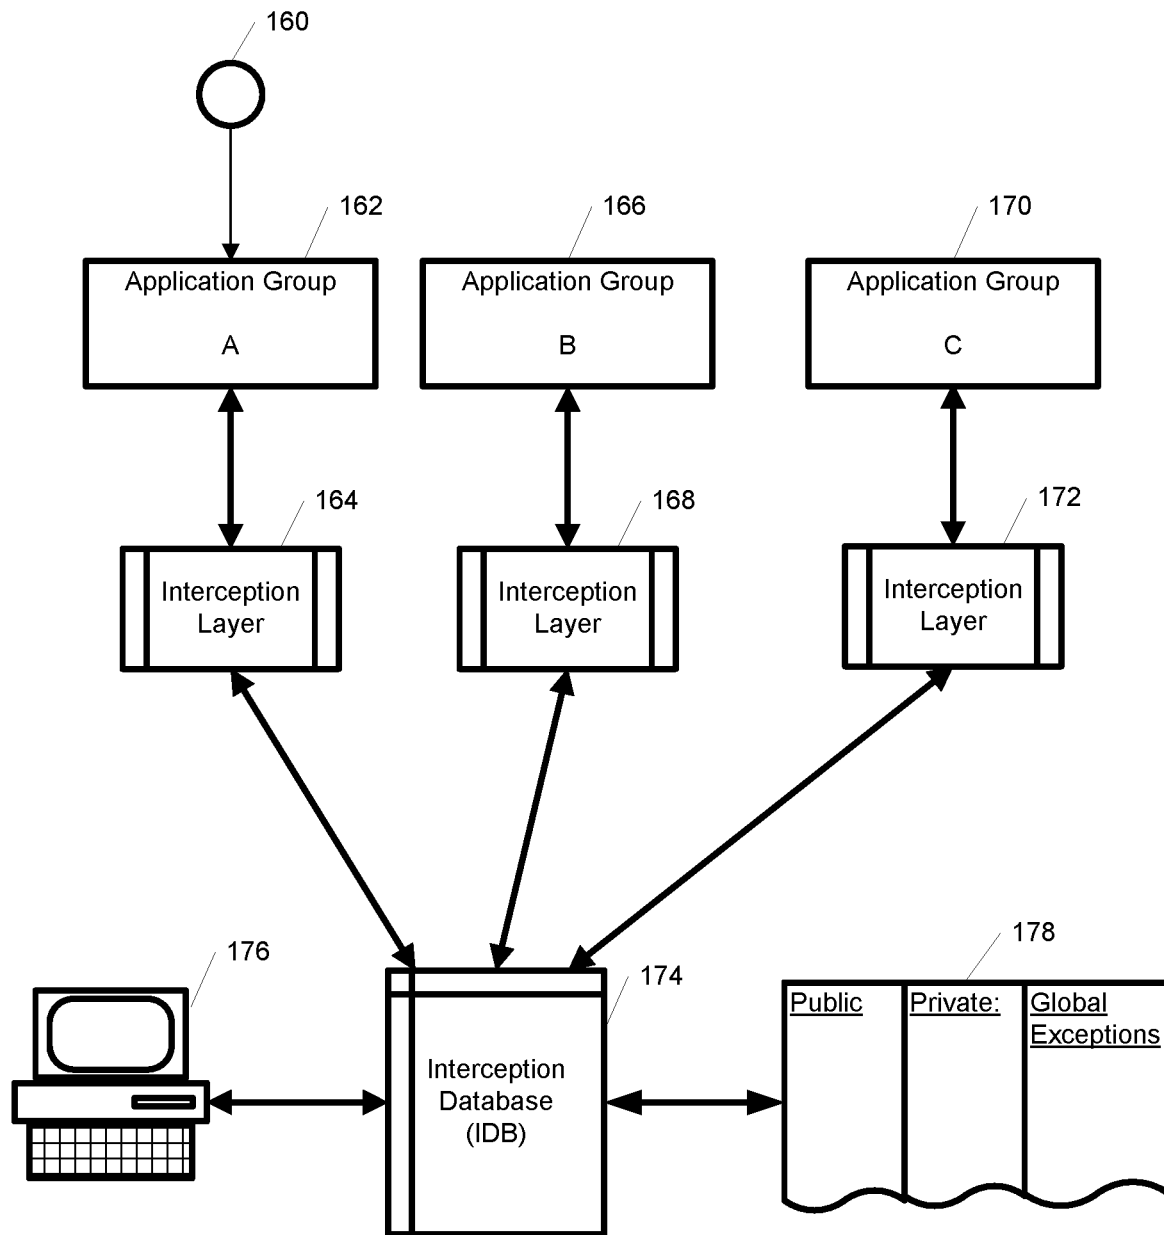


FIG.6 – Multiple Application Groups

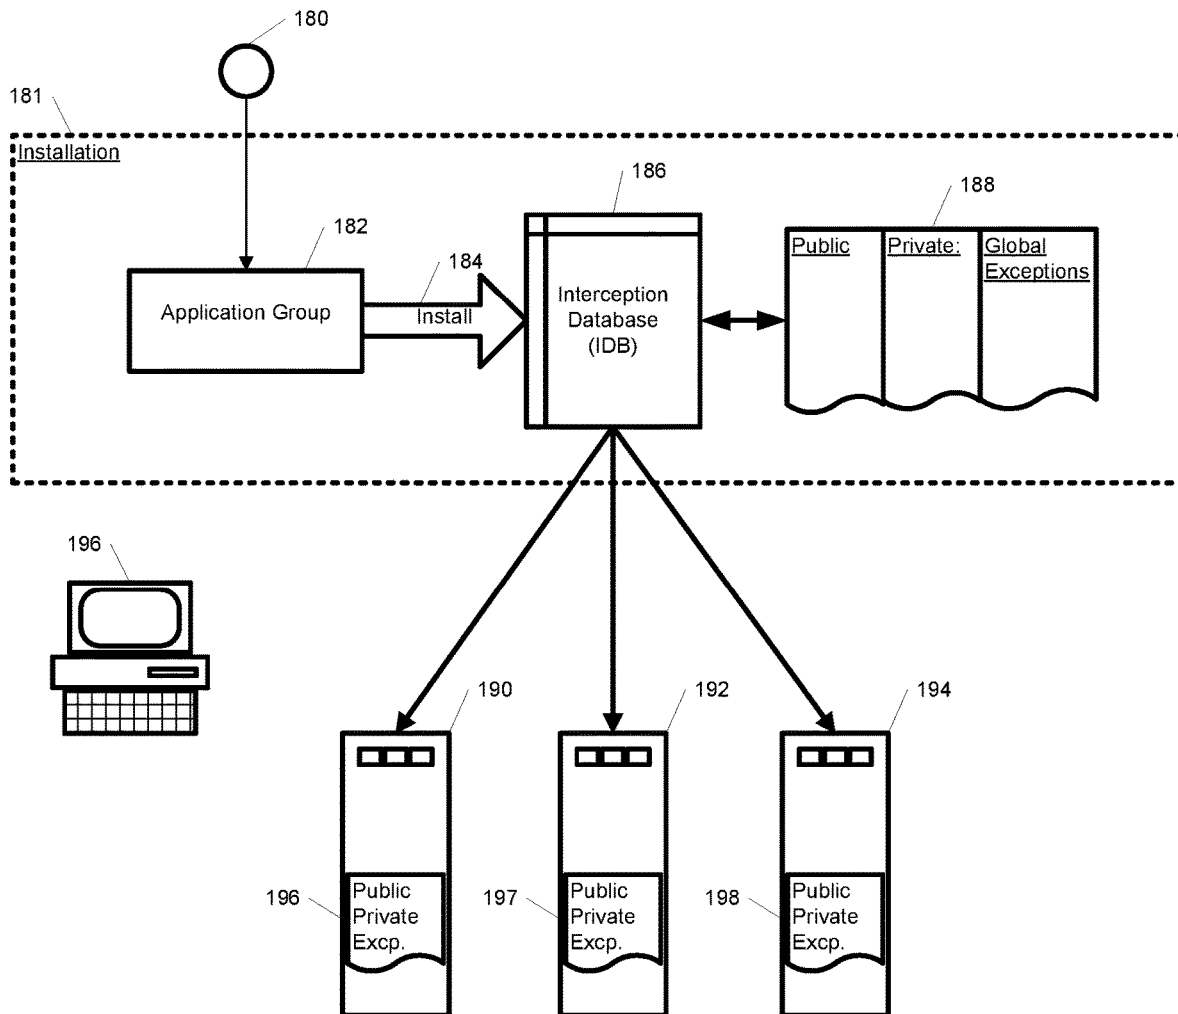


FIG.7 – Installation free deployment

**U.S. Patent**

Mar. 31, 2020

Sheet 8 of 10


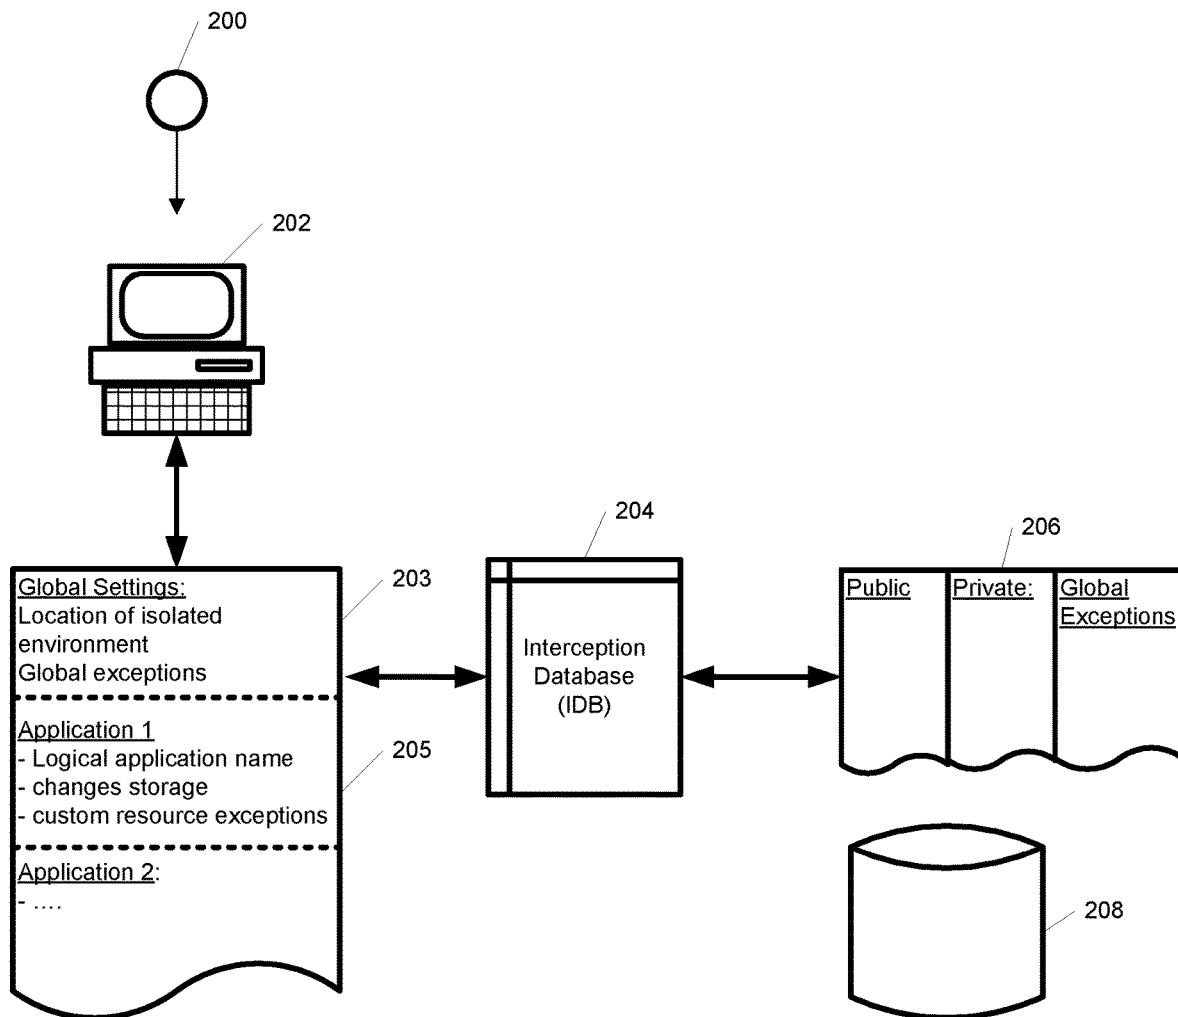
**US 10,606,634 B1**

FIG.8 – Administration



**U.S. Patent**

Mar. 31, 2020

Sheet 10 of 10

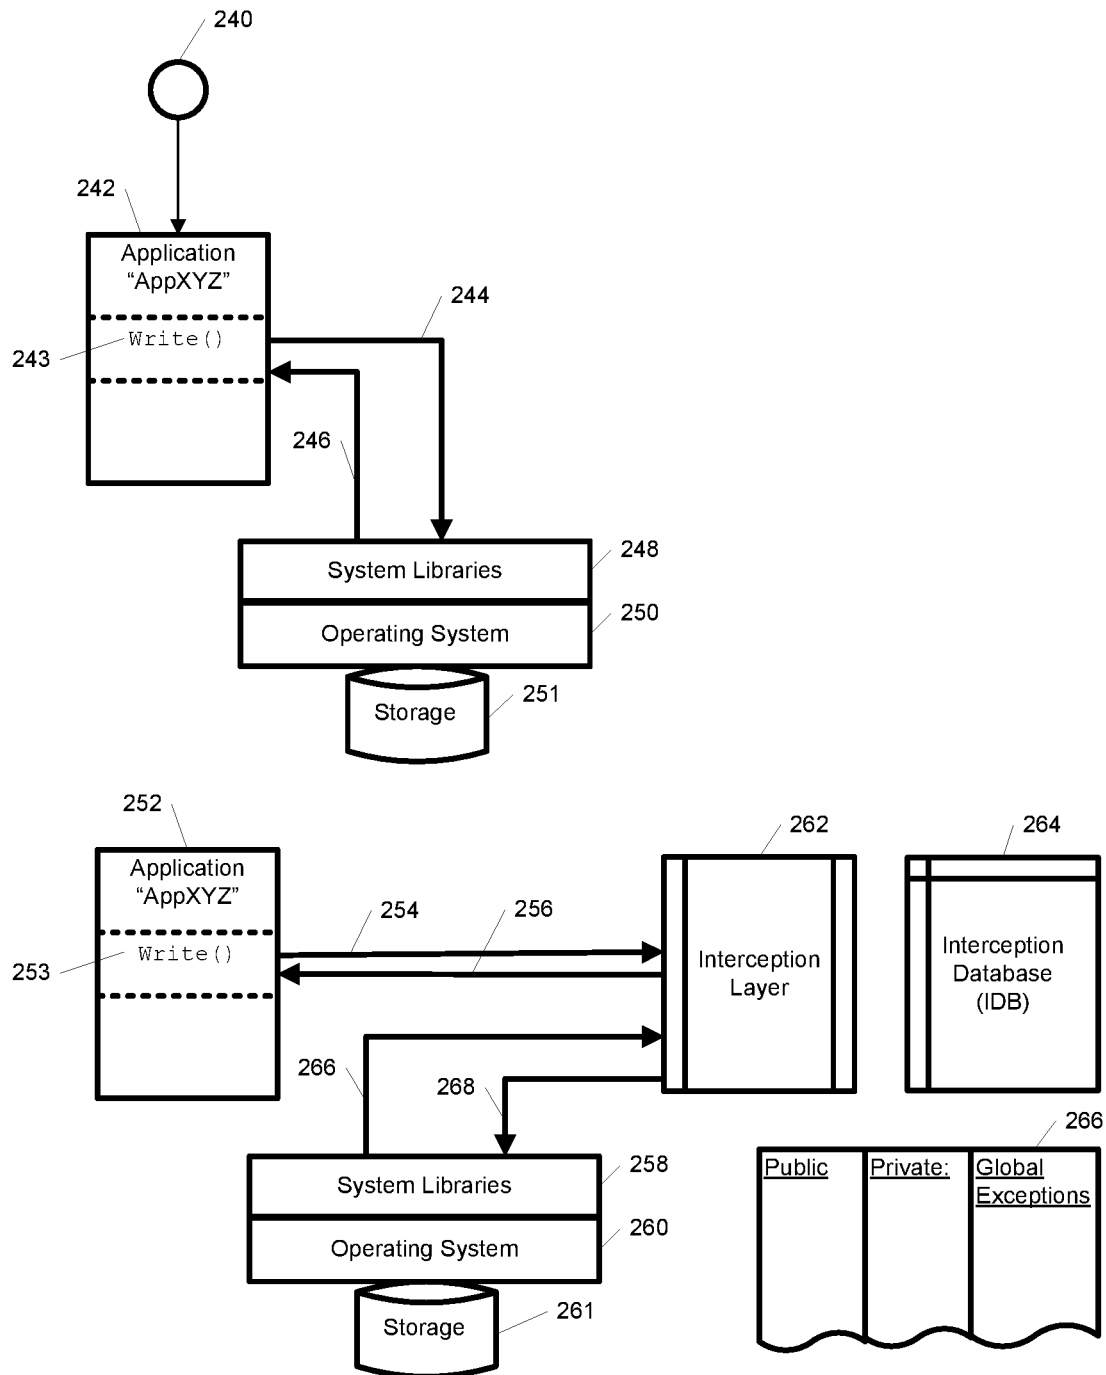
**US 10,606,634 B1**

FIG. 10 – Detailed control and dataflow

US 10,606,634 B1

1

**SYSTEM AND METHOD FOR APPLICATION  
ISOLATION**STATEMENT REGARDING FEDERALLY  
SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable

INCORPORATION-BY-REFERENCE OF  
MATERIAL SUBMITTED ON A COMPACT  
DISC

Not Applicable

NOTICE OF MATERIAL SUBJECT TO  
COPYRIGHT PROTECTION

A portion of the material in this patent document is subject to copyright protection under the copyright laws of the United States and of other countries. The owner of the copyright rights has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the United States Patent and Trademark Office publicly available file or records, but otherwise reserves all copyright rights whatsoever. The copyright owner does not hereby waive any of its rights to have this patent document maintained in secrecy, including without limitation its rights pursuant to 37 C.F.R. § 1.14.

**BACKGROUND OF THE INVENTION****1. Field of the Invention**

This invention pertains generally to enterprise computer systems, computer networks, embedded computer systems, wireless devices such as cell phones, computer systems, and more particularly to methods, systems and procedures (i.e., programming) for providing application isolation for multiple applications running on a host operating system.

**2. Description of Related Art**

In many environments one of the most important features is to ensure that one running application doesn't affect other running applications, and that the crash of one application doesn't compromise other running applications. In many environments applications share system resources, libraries and hardware, which exposes subtle interconnects between seemingly unrelated applications.

Several approaches have been developed addressing this fundamental problem. The first level of application isolation is provided by the operating system. Modern operating systems such as Linux, UNIX, Windows2000, NT, XP and Vista provide some level of application isolation through the use of processes, and the underlying hardware memory management unit. The use of processes generally ensure that one running application process cannot address memory owned and used by other processes. This first level of isolation does not address the use of shared resources, such as files, file systems, shared memory, and libraries, so other approaches have been developed

In U.S. Pat. No. 6,496,847 Bugnion et al. teach the use of a virtual machine monitor (VMM) with a protected host operating system (HOS). This invention partially solves the isolation problem by placing every application into its own VMM. The solution requires the use of a VMM subsystem and in some cases a customized operating system. U.S. Pat.

2

No. 6,496,847 does not provide isolation at the level of individual applications, but for entire operating systems with all the applications within it. It does not address the problem of application isolation with multiple natively running applications on one host computer.

In U.S. Pat. No. 6,601,081 Provino et al. teach the use of a virtual machine for a plurality of application programs. As with U.S. Pat. No. 6,496,847 the use of a VM subsystem simply moves the problem to a different layer, and does not address the fundamental issue of application isolation with several natively running applications on one host computer.

In U.S. Pat. No. 7,028,305 Schaefer teaches a system for creating an application protection layer to separate an application from the host operating system. Schaefer primarily teaches how to intercept the Windows registry to capture configuration information for Windows application and how to create a virtual operating environment for the application. Access to files is provided via a virtual file system, access to registry information via the virtual registry etc. For Unix and MacOS few specific teachings are presented.

The present invention provides a system, method, and computer readable medium to create an application isolation environment where applications can run unmodified, on un-modified operating systems without requiring any virtual environments, virtual machines or virtual machine monitors. The present invention also teaches how to manage and handle applications that share libraries and resources, and how to handle complex multi-process applications. In one embodiment an implementation in the Linux environment is described, in another embodiment an implementation on Windows is described.

**BRIEF SUMMARY OF THE INVENTION**

A method, system, apparatus and/or computer program are described for achieving application isolation for single and multi-process applications and their associated resources. The application isolation is provided without requiring any changes to the host operating system kernel or requiring any changes to the applications. The application isolation is fully transparent to both operating system and application and automatically adjusts for resources such as memory, storage, and CPUs being allocated and released. The application isolation is provided in an interception layer interposed between the individual applications and the operating system and an interception database. Preferably, any functional changes to system calls are done exclusively within the interception layer and interception database, and only in the context of the calling application.

Another aspect of the present invention relates to a method and a computer readable medium comprising instructions for application and application group isolation. The instructions are for installing the applications into the isolated environment, running the application in the isolated environment, un-installing applications from the isolated environment, configuring the isolated environments, and deploying the isolated environments.

Yet another aspect of the invention relates to a system for providing application isolation to one or more applications, the system comprising: one or more isolated environments including application files and executables; one or more interception layers intercepting access to system resources and interfaces; an interception database maintaining mapping between the system resources inside the one or more isolated environments and outside; and a host operating system, wherein the one or more applications are isolated

US 10,606,634 B1

3

from other applications and the host operating system while running within the one or more isolated environments.

#### Definitions

The terms “Windows” and “Microsoft Windows” are utilized herein interchangeably to designate any and all versions of the Microsoft Windows operating systems. By example, and not limitation, this includes Windows XP, Windows Server 2003, Windows NT, Windows Vista, Windows Server 2008, Windows Mobile, and Windows Embedded.

The terms “Linux” and “UNIX” are utilized herein to designate any and all variants of Linux and UNIX. By example, and not limitation, this includes RedHat Linux, Suse Linux, Ubuntu Linux, HPUNIX (HP Unix), and Solaris (Sun Unix).

The term “node” and “host” are utilized herein to designate one or more processors running a single instance of an operating system. A virtual machine, such as VMWare or XEN VM instance, is also considered a “node”. Using VM technology, it is possible to have multiple nodes on one physical server.

The terms “application” is utilized to designate a grouping of one or more processes, where each process can consist of one or more threads. Operating systems generally launch an application by creating the application’s initial process and letting that initial process run/execute. In the following teachings we often identify the application at launch time with that initial process.

The term “application group” is utilized to designate a grouping of one or more applications.

In the following we use commonly known terms including but not limited to “process”, “process ID (PID)”, “thread”, “thread ID (TID)”, “thread local storage (TLS)”, “instruction pointer”, “stack”, “kernel”, “kernel module”, “loadable kernel module”, “heap”, “stack”, “files”, “disk”, “CPU”, “CPU registers”, “storage”, “memory”, “memory segments”, “address space”, “semaphore”, “loader”, “system loader”, “system path”, and “signal”. These terms are well known in the art and thus will not be described in detail herein.

The term “transport” is utilized to designate the connection, mechanism and/or protocols used for communicating across the distributed application. Examples of transport include TCP/IP, Message Passing Interface (MPI), Myrinet, Fibre Channel, ATM, shared memory, DMA, RDMA, system buses, and custom backplanes. In the following, the term “transport driver” is utilized to designate the implementation of the transport. By way of example, the transport driver for TCP/IP would be the local TCP/IP stack running on the host.

The term “interception” is used to designate the mechanism by which an application re-directs a system call or library call to a new implementation. On Linux and other UNIX variants interception is generally achieved by a combination of LD\_PRELOAD, wrapper functions, identically named functions resolved earlier in the load process, and changes to the kernel sys\_call\_table. On Windows, interception can be achieved by modifying a process’ Import Address Table and creating Trampoline functions, as documented by “Detours: Binary Interception of Win32 Functions” by Galen Hunt and Doug Brubacher, Microsoft Research July 1999”. Throughout the rest of this document we use the term to designate the functionality across all operating systems.

4

The term “file context” or “context” is used in relation with file operations to designate all relevant file information. By way of example, and not limitation, this includes file name, directory, read/write/append/execute attributes, buffers and other relevant data as required by the operating system.

The term “transparent” is used herein to designate that no modification to the application is required. In other words, the present invention works directly on the application binary without needing any application customization, source code modifications, recompilation, re-linking, special installation, custom agents, or other extensions.

The terms “private and isolated environment” and “isolated environment” are used herein interchangeably to designate the private area set aside for application isolation, as described in further detail below.

The present invention provides application isolation at several levels: 1) during installation, all installation and registration information is intercepted and installation is re-directed to a private and isolated environment, 2) during launch of an application the installation information is retrieved and provided to the application again via interception, and 3) during access to external resources interception of all access is re-directed as necessary. The combination of all levels of isolation provides for fully transparent application isolation. Thus at all times, access to resources, configuration and run-time information is intercepted and re-directed.

By way of example, and not limitation, for embodiments within Windows operating systems, access to the Windows Registry is intercepted and included in the application isolation.

Further aspects of the invention will be brought out in the following portions of the specification, wherein the detailed description is for the purpose of fully disclosing preferred embodiments of the invention without placing limitations thereon.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

The invention will be more fully understood by reference to the following drawings which are for illustrative purposes only:

FIG. 1 is a block diagram of the core system architecture showing two applications, the interception layer, and the interception database.

FIG. 2 is a block diagram illustrating installation and running of applications

FIG. 3 is a block diagram illustrating un-installation

FIG. 4 is a block diagram illustrating the Interception Database

FIG. 5 is a block diagram illustrating running application groups

FIG. 6 is a block diagram illustrating running multiple application groups concurrently

FIG. 7. is a block diagram illustrating installation-free deployment

FIG. 8. is a block diagram illustrating administration

FIG. 9 is a block diagram illustrating various deployment scenarios

FIG. 10 is a block diagram illustrating interception data and control flow

#### DETAILED DESCRIPTION OF THE INVENTION

Referring more specifically to the drawings, for illustrative purposes the present invention will be described in



US 10,606,634 B1

5

relation to FIG. 1 through FIG. 10. It will be appreciated that the system and apparatus of the invention may vary as to configuration and as to details of the constituent components, and that the method may vary as to the specific steps and sequence, without departing from the basic concepts as disclosed herein.

### 1. Introduction

The context in which this invention is described is one or more applications being installed, running and accessing local and remote resources. Without affecting the general case of multiple applications, the following scenarios often depict and describe one or two applications as applicable. Multiple applications are handled in a similar manner.

### 2. Overview

FIG. 1 illustrates by way of example embodiment 10 the overall structure of the present invention. The following brief overview illustrates the high-level relationship between the various components; further details on the inner workings and interdependencies are provided in the following sections. FIG. 1. Illustrates by way of example embodiment 10 two applications A 22 and B 26 loaded in memory 14 on a node 12. The interception layers 16, 17, are interposed between the applications 22, 26 and the system libraries 18 and operating system 20. The interception database 28 provides system-wide persistent interception information and configuration information for the isolated environments. The interception layers 16,17 combined with the Interception database 28 provides application isolation 24. System resources, such as CPUs 36, I/O devices 34, Network interfaces 32 and storage 30 are accessed using the operating system. Devices accessing remote resources use some form of transport network 38. By way of example, system networking 32 may use TCP/IP over Ethernet transport, Storage 32 may use Fibre Channel or Ethernet transport, and I/O may use USB. The present invention access and arbitrate resources through the operating system and does not work at the transport level.

### 3. Installing and Running Applications

FIG. 2 illustrates by way of example embodiment 40 installation of a typical application “AppXYZ” 42. The Interception Layer (IL) 50 intercepts all calls to system libraries and the operating system. IL 50 communicates with the Interception Database (IDB) 58 to create a private and isolated environment where the application can execute without depending on or affecting other parts of the environment. By way of example, and not limitation, first the installation process requests a resource 44, such as opening a file. The resource request is intercepted by IL 50 and a request to create 54 a private instance of the resource is made to the Interception Database (IDB) 58. The IDB 58 is a system wide database containing mappings 60, 62, 64 between the resources as the application 42 requests them 60, and their private values inside the isolated environment 62, subject to global exceptions 64. Further details on the IDB are given in section 4 below. By way of example, and not limitation, if the resource request 44 was to create a file in C:\Program Files\AppDir, the IDB may map that to a private location 62, such as D:\private\AppXYZ\C\Program Files\AppDir. So while AppXYZ 42 operates under the assumption that it's working on C:\Program Files\AppDir, in reality all access has been intercepted and re-directed to

6

a private and isolated environment in D:\private\AppXYZ\C\Program Files\AppDir. The IDB 58 returns 54 the private resource to IL 50, which returns the resource handle 46 to the application 42. As the application 42 uses the resource 46 it operates under the assumption that the original resource request was satisfied, and is unaware that all resources have been relocated to a private and isolated environment. When use of the resource is terminated 48, the IL 50 sends a message to the IDB 58 that the resource currently is inactive 56. All mappings are maintained in the IDB 58 after the installation finishes as they may be needed after the initial request.

FIG. 2 also illustrates, by way of example embodiment 40, how an application 42 runs after being installed. As resources are opened, used, and freed, the same steps as described above are used. As the application 42 executes, it generally access or create resources not used during installation. By way of example, if AppXYZ 42 is a word processor, the user may create a document and save it to storage. That document did not exist as part of the installation process, but is handled using the same mechanisms previously taught. As the user choose to create a new document, AppXYZ 42 makes a request 44 to have the file created. This is intercepted by the IL 50 and forwarded 52 to the IDB 58. The IDB creates a mapping between the Applications 42s public document name 60, and the private and isolated document name 62. As with Application 42 information stored in the IDB 58, so is the application data information stored persistently until un-installation.

At times it may be desirable to store some user-data outside the isolated environment, such as on a central file server. In a preferred embodiment, this is supported by specifying which resource locations should remain fixed and public in the global exceptions 64. Such public resources are not translated into the isolated environment.

### 4. Uninstalling Applications

FIG. 3 illustrates by way of example embodiment 80, un-installation of a typical application AppXYZ 82. The un-installation uses and requests resources 84, which are intercepted by the IL 86 and redirected 88 by the IDB 90, as described above. All actions, such as deletion of files, are re-directed to the private and isolated location. When the un-install terminates, sometimes called exit( ), the exit is intercepted 92 by the IL 86, and forwarded 94 to the IDB 90. The IDB 90 removes all entries mapping 100 application AppXYZ 82 resources 96 against its isolated environment 98. The application is now uninstalled, and all isolation information has been removed.

### 5. Interception Database and Resource Mapping

The Interception Database (IDB) is a system wide database containing mappings between the resources as the application requests them, and their private values inside the isolated environment. FIG. 4 illustrates, by way of example embodiment 120, the Interception Database (IDB) 122, and its various components. The IDB 122 contains two main components, a rules engine 130 and the core resource mappings 132. The rules engine 130 contains the main high-level configuration information 124 as provided by an administrator 126. The rules engine 130 and its configuration information 124 includes, but is not limited to, information designating the base directory for installing the isolated environment, specific exceptions 138 to the resource mappings and the general mechanism used to

US 10,606,634 B1

7

create the mappings. The administrator 126 defines exceptions 138 as needed. The global exceptions contain all resources that should not be remapped to the isolated environments. Examples include, but are not limited to, shared storage, shared devices, network resources, and system-wide resources.

The resource mapping 132 maintains mapping between public resources 134 and the corresponding private and isolated resources 136. The resource mapping 132 also consults the global exceptions 138 prior to translating any public to private or private to public resource requests.

Resources take many forms including but not limited to files, fonts, shared libraries, shared devices, and storage. On Microsoft Windows the Registry is an important component and contains system wide configuration information used by most applications. Some resources, such as data files, tend to be local to the individual applications, while e.g. fonts tend to be shared between multiple applications.

Access to files are handled by the IL (FIGS. 2-50) intercepting all file operations between the application and the system libraries and operating systems. Examples include, but are not limited to `open()`, `fopen()`, `write()`, `read()`, `close()`, `seek()`, `remove()` and the Windows equivalents. Generally these functions either contain a public file name as part of the arguments, or a file handle to an already established file. The files names are remapped as described above, to an isolated environment, and any further reference to the handle is automatically re-directed to the isolated environment. File operations that return information, are translate back to the public values. By way of example, and not limitation, if the applications ask for "current directory", the public name, as the application expects is returned, and not the private name within the isolated environment. By way of further example, if the current directory is located on shared storage included the global exceptions 138, the directory is returned un-translated, as it's subject to the exception handling.

File, paths and other resource names can be specified both as absolute values or relative values. By way of example, and not limitation, an absolute path for a document file may be "C:\MyDocuments\myfile.doc", while a relative reference may be "... \docs\myfile.doc". Absolute references are resolved as previously described by consulting the public resources 134, private resources 136 and global exceptions 138. Relative addresses are resolved in a multi-step process: First relative names are converted to absolute names and then the absolute name is converted as previously described. This mechanism ensures fully transparent support of both absolute and relative naming of all resources.

Fonts pose particular problems, as fonts reside both in application-specific directories and global system directories, such as "C:\Windows\Fonts" on Windows and "/usr/X11R6/lib/X11/fonts/" and "/usr/share/fonts/" on Linux. An application may install font both into one or more global font directories as well as application-specific directories. All shared-fonts directories are included in the Global Exceptions 138 as they should be accessed directly. If during installation additional fonts are installed, they are installed according to the policy chosen by the administrator 126. Prior to installation, the administrator chooses if application-installed fonts are allowed to be placed in the global fonts directory or if they should be placed in the isolated environment. The rules engine 130 consults this administrative choice and upon receiving a request to enumerate the font directory will include isolated-environment fonts if so configured. If the application installs its fonts into its own file structure, the fonts are treated as normal files and are not

8

subject to the automatic enumeration as the application knows where to look for its application-specific fonts.

Modern operating systems share components across multiple applications. Such shared libraries also pose a special case. On Windows Dynamic Link Libraries (DLLs) and on Linux/UNIX shared objects (.so files) are examples of such shared components. On Window shared libraries primarily reside in C:\Windows and C:\Windows\System32, but can sit anywhere. On Linux/Unix the primary locations are '/usr/lib', '/usr/X11/lib' and the entire /usr/lib/ directory structure. The loader of the operating system traverses the system PATH to find any requested shared library, but this can be manually or programmatically changed as part of the load process. The PATH is set using environment variables both on Windows and Linux. In order to intercept loading of shares libraries the present invention loads the application in stead of using the system loader directly. This enables interception of library loading done by the loader. If during installation additional shared libraries are installed, they are installed according to the policy chosen by the administrator 126. Prior to installation, the administrator chooses if application-installed libraries are allowed to be placed in a global directory or if they should be placed in the private and isolated environment. If the libraries are placed into the private and isolated environment, the load PATH is adjusted to search the private location.

As with files, libraries can be loaded with both absolute and relative addresses. The load process handles the resource mapping as described above. In all cases, the loading must follow the same path and address resolution as the system loader provides.

If the application installs its shared libraries into its own file structure, the libraries are treated as normal files and are not subject to an adjusted PATH or load-order as the application knows where to look for its application-specific libraries. In the preferred embodiment, if the application installs new shared libraries, they are installed into the isolated environment

One of the most significant sources of application incompatibilities, and one of the motivators for the present invention, is shared library conflict. By way of example, and not limitation, if a shared library is loaded on the system, and a new application installs an older version of the library, the older version may overwrite the newer version and render other applications non-functional based on having their shared library replaced by an incompatible older version. This is a common problem on both the Windows and Linux platforms. Using the preferred embodiment described above, the application would install the older library into its isolated environment and therefore not affect other applications. The application would load and use the older library without ever being aware that it was provided from the isolated environment, and other applications running on the system would be unaffected by the installation of the older library.

Microsoft Windows uses a special configuration system generally referred to as "the Registry". The registry contains configuration, installation and un-installation information for applications on the system. When an application installs on a Windows system, it uses the registry to store values such as "home directory", "recent files", etc. The preferred embodiment on Windows systems additionally include interception of all registry information, and ensures that installation and runtime information that would normally go into the registry, in stead is stored and maintained in the IDB. During installation of a Windows application all registry information is thus stored in the IDB and not the

US 10,606,634 B1

9

registry. When an application requests registry information, the information is provided from the IDB, and not the registry. This ensures complete application isolation from the registry.

The isolated environment contains all application files and shared resources and their respective mappings. These are all preserved persistently on local or remote storage and can be archived, copied and restored as any other set of files. Specifically, the isolated environment directory structure can be copied to a different node, and used directly to start the application on that node.

So far the Interception database has been described as a “database”. Based on the teachings above, it’s readily apparent to anyone skilled in the art, that the only requirement is that updates to the resource tables **134**, **136** and **138** be atomic at the record level. This functionality can be readily implemented in a variety of ways, including using Java’s ConcurrentHashMap( ), the Windows .NET equivalents, or by custom programming the data structures and locking. Furthermore, preferably concurrent access to the Interception Database translations is provided. In an alternate implementation such a custom interception database is used in stead of a full database.

#### 6. Interception Data and Control Flow

FIG. **10** illustrates by way of example embodiment **240** the data and control flow in more detail. By way of example, and not limitation, consider first an environment with the present invention inactive. An application **242** calls a write( ) **243** operation. The write operation is resolved by the operating system loader and directed **244** to the system libraries **248** and operating system **250**, and ultimately writes data to storage **251**. Return value is returned **246** to the caller **243** within the calling application **242**.

By way of example, and not limitation, consider an environment with the present invention active. An application **252** calls a write( ) **253** operation. As described in above, the write( ) is intercepted **254** by the interception layer **262**. Parameters to the write( ) call are translated by the Interception Database **264** and the rules for the isolated environment **266** and the file context and parameters of the calling write are adjusted to point to the isolated environment. The write call **268** is then forwarded to the system libraries **258** and operating system **260** as were the case with the present invention inactive. The return value **266** from the write is returned to the IL **262** which, using the IDB **264**, maps the result back into the original context and returns the value **256** to the caller **253**. The application **252** issuing the write **253** operating is thus unaware that the write is being intercepted and re-directed to the isolated environment. All translation and isolation is performed outside the application **252**, and before the write operation ever reaches the system libraries **258** or operating system **260**.

A specific example, using ANSI C, further illustrates the mechanics of the IL **262** and IDB **264** translations. Consider an example where a file is opened for writing, a small text is written, and the file is closed using the following code int main(void) {char const \*pStr=“small text”; FILE \*fp=fopen(“/home/user/newfile.txt”, “w”) if (fp !=null) fwrite(pStr, strlen(pStr),1,fp); fclose(fp)}

The call to fopen( ) returns a file pointer, which the fwrite( ) operation uses to write data to the file. The call to fopen( ) includes the file name “/home/user/newfile.txt” as the first parameter. The Interception Layer **262** intercepts the call to fopen( ) and changes the actual filename to the corresponding location in the isolated environment before

10

passing **268** the call on to the system library implementation **258**. The following fwrite( ) operation is unaware that the file pointer points to the isolated environment and simply writes the data. Finally, fclose( ) is called to close the file. The file pointer still points to the isolated environment and the close proceeds as a close would without the present invention active.

#### 7. Application Groups

At times multiple applications share data, libraries and work in combination. By way of example, and not limitation, Microsoft Word may include a Microsoft Excel spreadsheet. In general any number of applications may need to collaborate and share data. So far the approach has been to isolate applications so that, to continue the example, if Word and Excel were installed separately, they would both be isolated and not able to work together. To enable sharing between pre-designated applications, the applications need to be grouped together in an application group and installed inside the same isolated environment. FIG. **5** illustrates by way of example embodiment **140**, an application group **142** operating within the present invention. The administrator **152** pre-defines the application group **142** and the individual applications within the group: App-1 **143**, App-2 **144** and App-n **146**. The administrator **152** commits the application group to the IDB **150**. The IDB uses the same mechanisms as described above for individual applications, and structures the isolated environment **154** so that the individual applications share resources and file system. By installing the applications together they automatically use the same isolated environment and sharing is fully automatic without requiring any additional information. The interception layer **148** intercepts, as previously described, and requires no special configuration; all application group information is contained within the IDB **150** and the settings for the isolated environment **154**.

#### 8. Concurrent Operation of Multiple Application Groups

FIG. **6** illustrates by way of example embodiment **160**, concurrent operation of three application groups: application group A **162**, application group B **166** and application group C **170**. Each application group consists of one or more applications. As previously described each application group has a dedicated interception layer: IL **164** for application group A **162**, IL **168** for application group B **166**, and IL **172** for application group C **170**. Each interception layer **164**, **168**, **172** provide the interception services as previously described, with each attached to only one application group. As previously disclosed, the Interception Database **174** is global, and is shared between all application groups and interception layers.

The administrator **176** commits all administrative settings to the IDB **174**, which is reflected in the database tables for the isolated environment **178**.

#### 9. Running Multiple Concurrent Instances of One Application

At times it may be desirable to run multiple instances of the same application or application group, but in separate isolated environments. Referring again to FIG. **6** for illustrative purposes. The administrator **176** defines each instance of the application group using separate application group names. Even though Application Group A **162**, Appli-



## US 10,606,634 B1

## 11

cation Group B **166**, and Application Group C **170** are identical, they have been pre-defined with their own environment, and thus run in separate isolated environments without any further intervention or configuration.

## 10. Installation-Free Deployment

One of the major problems with application deployment is the actual installation and the associated risks as described previously. Using the present invention, a pre-created isolated environment can be used in place of performing an actual installation. The isolated environment contains all application files, shared libraries, and installation data and can be moved, copied and run from anywhere the present invention is present.

FIG. 7 illustrates by way of example embodiment **180**, how to deploy an isolated environment without needing more than one initial installation **181**. First the administrator **196** installs **184** the application group **182**. As previously taught the interception database **186** creates an isolated environment **188** which contains all application group data, including shared files, data and programs. As taught above, the isolated environment is written to storage and can be copied and run elsewhere. With the isolated environment ensuring isolation from the underlying operating system and applications, an isolated environment can be deployed on a different node by copying the entire isolated environment directory structure to the new node and starting the application. Referring to FIG. 7, the administrator **196** copies the isolated environment **188** into the first node **190**, the second node **192** and the third node **194**.

In an alternate embodiment, the environment **188** is stored on shared storage, and is accessed directly from the shared storage. In this embodiment, the isolated environment is loaded directly from shared storage, and only local data, such as temporary files, are kept locally.

In another embodiment, the environment **188** is saved to storage and shipped to a remote site. The remote site loads the environment and runs the applications directly from within the environment without any installations. In this embodiment the present invention may be used for disaster recovery.

## 11. Administration

FIG. 8 illustrates by way of example embodiment **200**, the management infrastructure. The administrator **202** communicates configuration preferences to the Interception database **204** for each isolated environment **206**. The IDB **204** contains, as described above, two separate modules: 1) a rules engine (FIGS. **4—130**) and 2) management of the resource mappings (FIG. **4—132**). The rules engine implements the administrator provided resource translations and populates the tables (FIG. **4—134,136,138**).

The administrator **202** provides general configuration information applicable to all isolated environments and applications **203**, unless explicitly changed for a particular isolated environment **205**. Examples of administrator-provided global configuration information **203** includes, but is not limited to

- Default storage location for all isolated environments
- Default resource exceptions
- Default application and application group naming
- Default policy for installing fonts and shared resources into global or isolated environment

Each setting can be changed, i.e. replaced, on an application by application basis, and on an application-group by

## 12

application basis. As determined by the administrator, examples of administrator-provided application-level configuration information **205** include, but is not limited to

- Storage location for isolated environment
- Logical name of application or application group
- Application or application-group specific resource exceptions
- Policy for installing fonts and shared resources into global or isolated environment
- The combination of the global configuration information **203** with the rules engine (FIG. **4—130**), makes the configuration and deployment on new isolated environment fully automatic after the initial global configuration has been provided. As described, it may be desirable to change one or more of an application's isolated environment settings. By way of example, and not limitation, if a particular application needs to locally access certain resources only available on a particular server, that one application's isolated environment would be located on that particular server, while all other environments were centrally stored. The ability to "mix and match" environments and deployments ensure full flexibility and ability to deploy multiple applications in a heterogeneous environment with all the benefits of the present invention.

In another embodiment the administrative functions **202** is done programmatically using an Application Programming Interface (API).

## 12. Deployment Scenarios

FIG. 9 illustrates by way of example embodiment **220** a variety of ways the invention can be configured to operate. In one embodiment, the invention is configured to run from a central file server **222**, in another it is configured to run on a pair of application servers **224, 226**. In a third embodiment the invention is configured to run on a LAN **228** connected PC **232** together with the application servers **224, 226**, and with environments loaded from the central file server **222**. In a fourth embodiment the invention is configured to isolate applications on a cell phone **230**, which is wirelessly connected **238** to the Internet **236**, the application servers **224,226** and the file server **222**. A fifth embodiment has an isolated environment on a home-PC **234** connected via the internet **236** to the application servers **224,226** and the LAN PC **232**. The invention runs on one or more of the devices, can be distributed across two or more of these elements, and allows for running the invention on any number of the devices (**222,224,226,230,232,234**) at the same time

## 13. Conclusion

In the embodiments described herein, an example programming environment was described for which an embodiment of programming according to the invention was taught. It should be appreciated that the present invention can be implemented by one of ordinary skill in the art using different program organizations and structures, different data structures, and of course any desired naming conventions without departing from the teachings herein. In addition, the invention can be ported, or otherwise configured for, use across a wide-range of operating system environments.

Although the description above contains many details, these should not be construed as limiting the scope of the invention but as merely providing illustrations of some of the exemplary embodiments of this invention. Therefore, it will be appreciated that the scope of the present invention fully encompasses other embodiments which may become

US 10,606,634 B1

13

obvious to those skilled in the art, and that the scope of the present invention is accordingly to be limited by nothing other than the appended claims, in which reference to an element in the singular is not intended to mean "one and only one" unless explicitly so stated, but rather "one or more." All structural and functional equivalents to the elements of the above-described preferred embodiment that are known to those of ordinary skill in the art are expressly incorporated herein by reference and are intended to be encompassed by the present claims. Moreover, it is not necessary for a device or method to address each and every problem sought to be solved by the present invention, for it to be encompassed by the present claims. Furthermore, no element, component, or method step in the present disclosure is intended to be dedicated to the public regardless of whether the element, component, or method step is explicitly recited in the claims. No claim element herein is to be construed under the provisions of 35 U.S.C. 112, sixth paragraph, unless the element is expressly recited using the phrase "means for."

What is claimed is:

1. A system, comprising:  
one or more central processing units;  
one or more isolated environments including one or more applications; and  
one or more resource mappings between resources as requested by the one or more applications and the corresponding resources inside said isolated environments;  
wherein the one or more central processing units and the one or more isolated environments are configured to interact with each other;  
wherein a resource mapping for an application is created or updated during one or more of installing said application in an isolated environment, running said application in said isolated environment, or accessing a resource corresponding to said resource mapping; and  
wherein a resource mapping for an application is removed or updated during one or more of uninstalling said application, deleting a resource corresponding to said resource mapping, archiving at least one of the one or more isolated environments, or copying an isolated environment to a new location.
2. The system according to claim 1, wherein the one or more applications are isolated from other applications and a host operating system while the one or more applications run within the one or more isolated environments.
3. The system according to claim 1 comprising one or more interception layers configured to intercept access to host operating system resources and host operating system interfaces.
4. The system according to claim 3, wherein the one or more interception layers intercept calls by the one or more applications to the host operating system and system libraries.
5. The system according to claim 1, wherein updates to the one or more isolated environments occur as the one or more applications use additional resources.
6. The system according to claim 1, wherein said one or more resource mappings are maintained in an interception database.
7. The system according to claim 1, wherein the one or more isolated environments are stored on a local storage.
8. The system according to claim 1, wherein the one or more isolated environments are stored on a networked storage and the one or more applications are delivered over a network.

14

9. The system according to claim 1, wherein each of the one or more applications is installed into its own isolated environment.

10. The system according to claim 1, wherein two or more applications are installed into a shared isolated environment.

11. The system according to claim 10, wherein the two or more applications share resources inside the shared isolated environment.

12. The system according to claim 1, wherein two or more applications are installed into separate isolated environments and the one or more applications run concurrently in the separate isolated environments.

13. The system according to claim 1, wherein a first application of the one or more applications is installed twice into separate isolated environments, and the separate isolated environments run concurrently and independently.

14. A method, comprising:

creating one or more isolated environments during installation of one or more applications;

maintaining a mapping between a resource as requested by the one or more applications and the corresponding resource inside said isolated environments, wherein said mapping is created or updated during one or more of installing an application in an isolated environment, running said application in said isolated environment, or accessing a resource corresponding to said resource mapping; and

uninstalling an application of the one or more applications, wherein said uninstalling comprises one or more of removing at least one of said mappings, uninstalling said application, and removing isolated environment information from storage.

15. The method of claim 14 comprising intercepting access to system resources and interfaces at one or more interception layers.

16. The method of claim 14 comprising updating the one or more isolated environments as the one or more applications use additional resources.

17. The method 14 comprising isolating the one or more applications from other applications and a host operating system while running within the one or more isolated environments.

18. A non-transitory computer readable storage medium comprising instructions for:

creating one or more isolated environments during installation of one or more applications;

maintaining a mapping between a resource as requested by the one or more applications and the corresponding resource inside said isolated environments, wherein said mapping is created or updated during one or more of installing an application in an isolated environment, running said application in said isolated environment, or accessing a resource corresponding to said resource mapping; and

uninstalling an application of the one or more applications, wherein said uninstalling comprises one or more of removing at least one of said mappings, uninstalling said application, and removing isolated environment information from storage.

19. The non-transitory computer readable storage medium of claim 18 comprising instructions for updating the one or more isolated environments as the one or more applications use additional resources.

20. The non-transitory computer readable storage medium of claim 18 comprising instructions for isolating the one or

US 10,606,634 B1

**15**

more applications from other applications and a host operating system while running within the one or more isolated environments.

\* \* \* \* \*

**16**